

ERMETICA 98 CAST ROUND

ARIA
AIR

AIRTIGHT / ÉTANCHE / RAUMLUFTUNABHÄNGIG / HERMÉTICA / HERMÉTICA



Optional



PALMARE / PDA
Personal Digital Assistant



Resistenza in ceramica

Ceramic heater / Résistance en céramique / Keramik-Zündkerze
Resistencia de cerámica / Resistência de cerâmica



98CASTROUND.10C

1 canalizzazione / 1 duction / 1 canalisation / 1 Kanalisierung
1 canalización / 1 canalização



98CASTROUND.10C

2 ventilatori indipendenti per la canalizzazione / 2 independent fans for duction / 2 ventilateurs indépendants pour canalisation
2 unabhängige Lüfter zum Kanalisierungs / 2 ventiladores independentes para canalización / 2 ventiladores independentes para canalização



Motore ventilazione frontale / Front ventilation motor

Moteur de ventilation frontal / Motor für die Frontbelüftung
Motor de ventilación frontal / Motor de ventilação frontal




Valvola antiscoppio / Explosion proof valve

Soupape anti explosion / Explosionsschutzventil
Válvula antiexplosión / Válvula anti-explosão




Uscita fumi superiore o posteriore / Upper or rear smoke outlet

Sortie de fumée supérieure ou postérieure / Extra oberer oder hinterer Rauchauslass
Salida de humos superior o trasera / Saída de fumaça superior ou traseira



98CASTROUND.6
98CASTROUND.8
98CASTROUND.10C

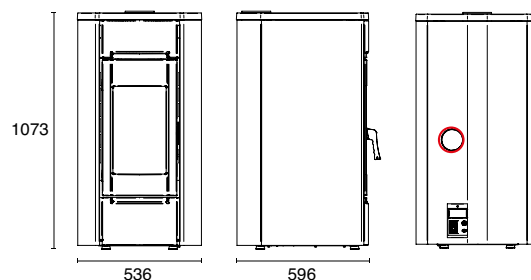

Tubo coassiale superiore
Upper Coaxial pipe
Sortie concentrique supérieure
Oberes Koaxialrohr
Tubo coaxial superior
Tubo coaxial superior



Download Area



Solo Italia / Italy only

MAX - MIN

A+



98CASTROUND.6
165 m³

98CASTROUND.8
195 m³

98CASTROUND.10C
240 m³

Potenza globale / Heat input / Puissance thermique totale
Thermische Gesamtleistung / Potencia global / Potência global

kW

6,8 - 4,3

8,0 - 4,3

9,7 - 4,3

Potenza nominale / Nominal heat output / Puissance nominale
Thermische Nennleistung / Potencia nominal / Potência nominal

kW

6,4 - 4,1

7,5 - 4,1

8,9 - 4,1

Consumo orario pellet / Pellet hourly consumption
Consommation horaire de granulés / Pelletverbrauch pro Stunde
Consumo horario de pellets / Consumo de pellet por hora

Kg - h

1,41 - 0,9

1,65 - 0,9

2,0 - 0,9

Efficienza / Efficiency / Rendement / Ausbeute / Eficiencia / Eficiência

%

94,5 - 93,9

94,1 - 93,9

93,9 - 91,9

Diametro entrata aria / Air inlet tube / Entrée diamètre d'air / Durchmesser des Lufteinlasses / Diámetro de entrada de aire / Diámetro da entrada de ar

Ø mm

50

50

50

Diametro uscita fumi / Smoke outlet tube / Sortie diamètre fumée
Durchmesser Rauchabzug / Conducto de descarga de humos / Saída de fumos

Ø mm

80

80

80

Capacità serbatoio pellet / Tank capacity / Capacité réservoir granulés
Fassungsvermögen Pelletbehälter / Capacidad del depósito de pellets
Capacidade do reservatório de pellet

Kg

20

20

20

Autonomia / Autonomy / Autonomie / Autonomie / Autonomía / Autonomia

h

22 - 14

22 - 12

22 - 10

Potenza elettrica di esercizio / Nominal power input / Puissance absorbée
nominale / Nennleistung / Energía eléctrica para ejercer / Entrada de potencia nominal

W

350 - 90

350 - 118

350 - 118

Peso / Weight / Poids / Gewicht / Peso

Kg

145

145

150



WHITE

BORDEAUX

BLACK